

G100.DUOSIP Curve Recessed In-Ground LED Luminaire

Datasheet



Product Codes


Unit G100.DUOSIP	Series CR	Colour Temp.: 3K (3000K) 4K (4000K) 2.7K (2700K)	Beam Angle (°) 120	Colour: SS (316 Stainless Steel)	Input Voltage: 24V
----------------------------	---------------------	--	------------------------------	--	------------------------------

Dimensions (mm)

Product Dimensions



Optional Mounting Box dimensions | Code: IP-002-WBX



Electrical

Input Voltage DC 24V	Power Usage 2W	LED: 2X1W	Current 350mA
--------------------------------	--------------------------	---------------------	-------------------------


Operational

CRI Value CRI90	Lumen Output: 3K: 192lm 4K: 196lm 2.7K: 188lm	Warranty: 10 Years
---------------------------	---	------------------------------

Physical

Adjustable Angle (°) Fixed	IP Rating: IP67	IK Rating: IK08	Materials Stainless Steel Aluminum Glass
--------------------------------------	---------------------------	---------------------------	--

DC 24V WIRING

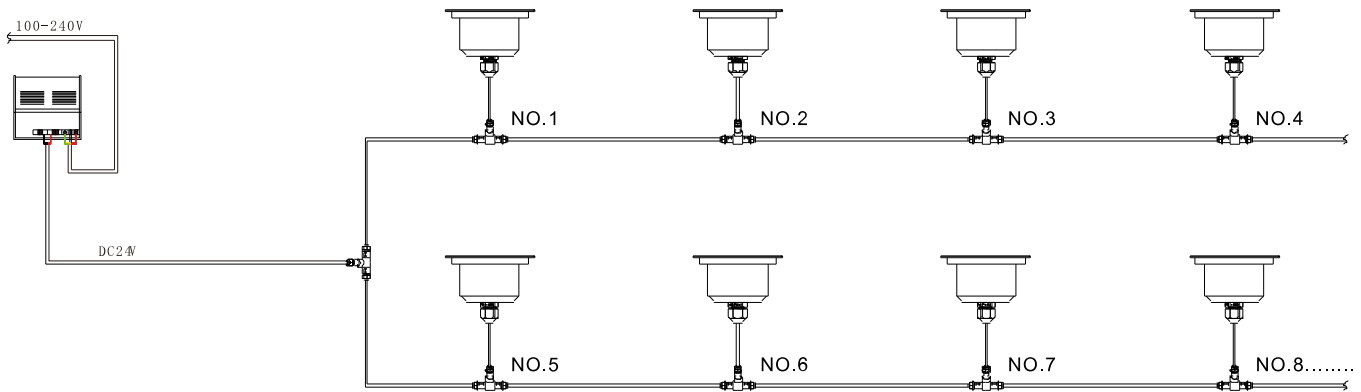

Lamps overall power depends on the main power supply (can not exceed 80% of main power supply)

AC 240V WIRING

