


# D2000 SHX Linear LED surface




<b>Electrical:</b>	<b>Wattage:</b> 33W	<b>Efficacy:</b> 61-62lm/W	<b>Dimming:</b> Triac (Digital Driver)	<b>Longevity:</b> L70 = 50,000 Hrs L50 = 80,000 Hrs
<b>Optical:</b>	<b>Lumen output:</b> 2000-2040lm	<b>Colour temperature:</b> 3000K (3K) 4000K (4K)	<b>Beam angle:</b> 10° 40°	<b>Tru-Colour:</b> Yes
<b>Physical:</b>	<b>Hole cutout:</b> 20mm	<b>Gimbal angle:</b> 90° (360° rotation)	<b>Warranty:</b> 7 years	<b>IP rating:</b> IP44
	<b>Type:</b> Surface-mounted	<b>Body colour:</b> ● White ● Black	<b>Fascia colour:</b> N/A	<b>Fascia style:</b> N/A

## Photometrics:

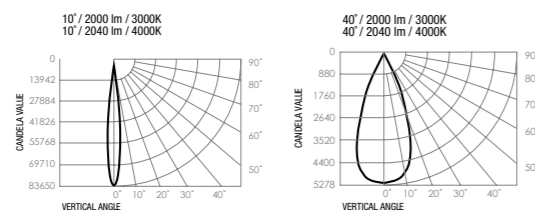

## Dimensions:

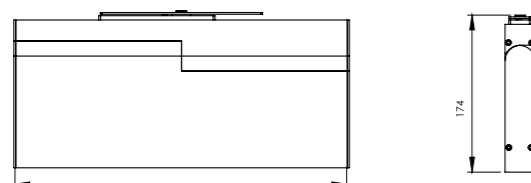

Specifying product:	Product Name	Family	Colour Temp.	Beam Angle	Body Colour	Eg. Product Code
	D2000.SHX	LN	3K 4K	10° 40°	White Black	D2000.SHX-LN-3K-10-W



- The fully adjustable D2000 SHX Linear provides unparalleled power and precision, giving you the ability to direct 2000 lumens of Tru-Colour brightness in any direction you please.