


D550 SHX Curve LED surface




Electrical:	Circuit Wattage: 8.5W	Delivered Light Efficacy: 65-66lm/W	Dimming: Phase Dimming (Standard)	Longevity: L70 B10 = 70,000 Hrs L50 = 110,000 Hrs
Optical:	Delivered Lumens: 550-560lm	Colour Temperature: 3000K (3K) 4000K (4K) 2700K (2.7K) (special order) 5000K (5K) (special order)	Beam Angle: 36°	Tru-Colour: Yes
Physical:	Hole Cutout: 20mm	Gimbal Angle: 90° (360° rotation)	Warranty: 7 years of luminaire warranty & 5 years of driver warranty	IP Rating: IP44
	Type: Surface-mounted	Body Colour: <input type="radio"/> White (W) <input checked="" type="radio"/> Black (B)	Fascia Colour: <input checked="" type="radio"/> Black (B)	Fascia Style: N/A

Photometrics:



Dimensions:

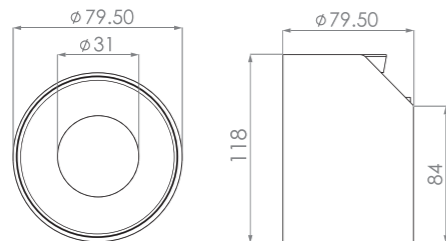

Specifying Product:

Product Name	Family	Colour Temp.	Beam Angle	Body Colour	Version No.	Eg. Product Code
D550.SHX	CR	3K 4K	36°	White Black	1.5	D550.SHX-CR-3K-36-W-1.5



- The fully adjustable D550 SHX Curve features a constant friction hinge, allowing the fitting to be easily readjusted, while at the same time ensuring that it stays where intended for years to come.